


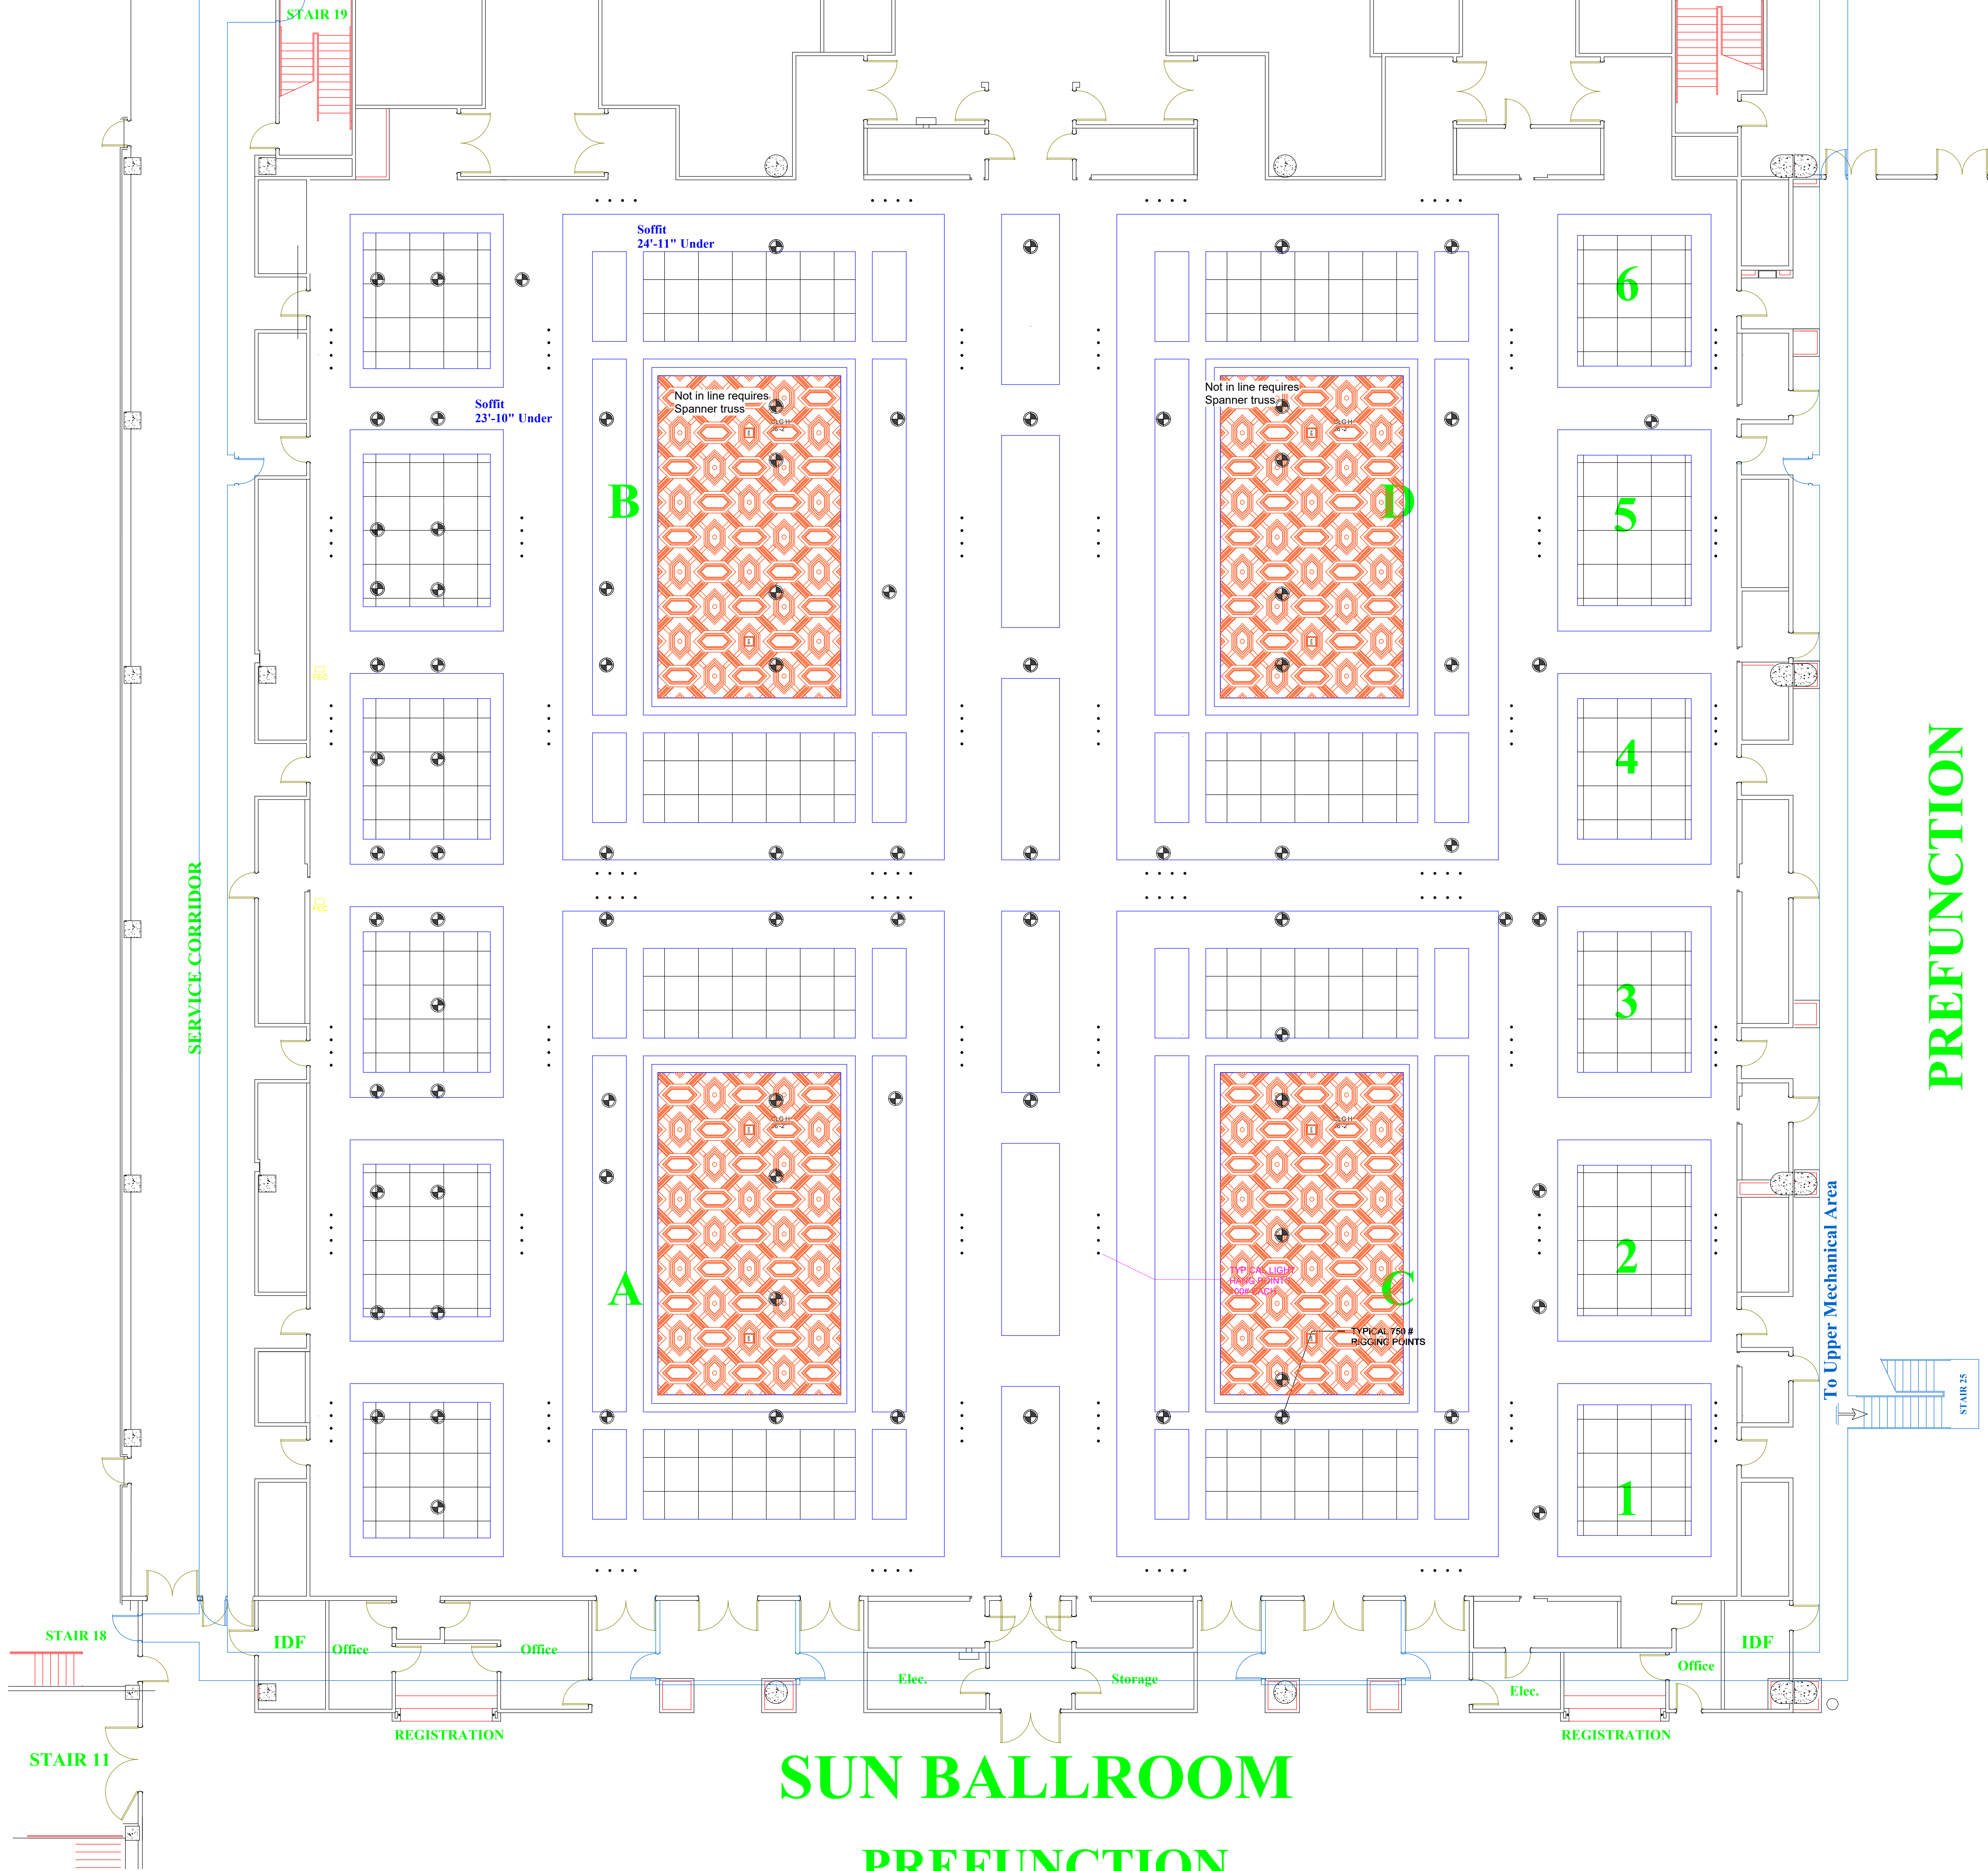

RIGGING POINT QTY	
ROOM SQ. FT.	29,123
MAX CEILING HEIGHT	26'2"
MIN CEILING HEIGHT	23'10"
RIGGING POINT WLL	750 LBS

- (1) CLIENTS ARE RESPONSIBLE FOR DISCLOSING ALL RIGGED ITEMS REGARDLESS OF WEIGHT.
(2) POINT LOAD CALCULATIONS WILL BE VERIFIED PRIOR TO LOAD-IN. UNDISCLOSED ITEMS MAY RESULT IN ADDITIONAL POINT CHARGES AND DELAYS IN SET-UP.
(3) NOTHING IS TO BE HUNG FROM THE AIRWALL TRACKS.
(4) ENCORE RIGGING SERVICES WILL APPROVE ALL RIGGING LOADS PRIOR TO LOAD-IN DATE.
(5) ALL HOISTS AND CONTROL WILL BE PROVIDED BY ENCORE.
(6) ALL RIGGING HARDWARE MUST MEET ANSI STANDARDS & DISPLAY BATCH LOT IDENTIFICATION.
(7) DRAWING IS NOT AN EXACT PLAN AND IS INTENDED TO BE USED AS A GUIDE TO THE APPROXIMATE ROOM SET UP.